


REV.NO.	DESCRIPTION	BY	DATE	C.NO.
---------	-------------	----	------	-------

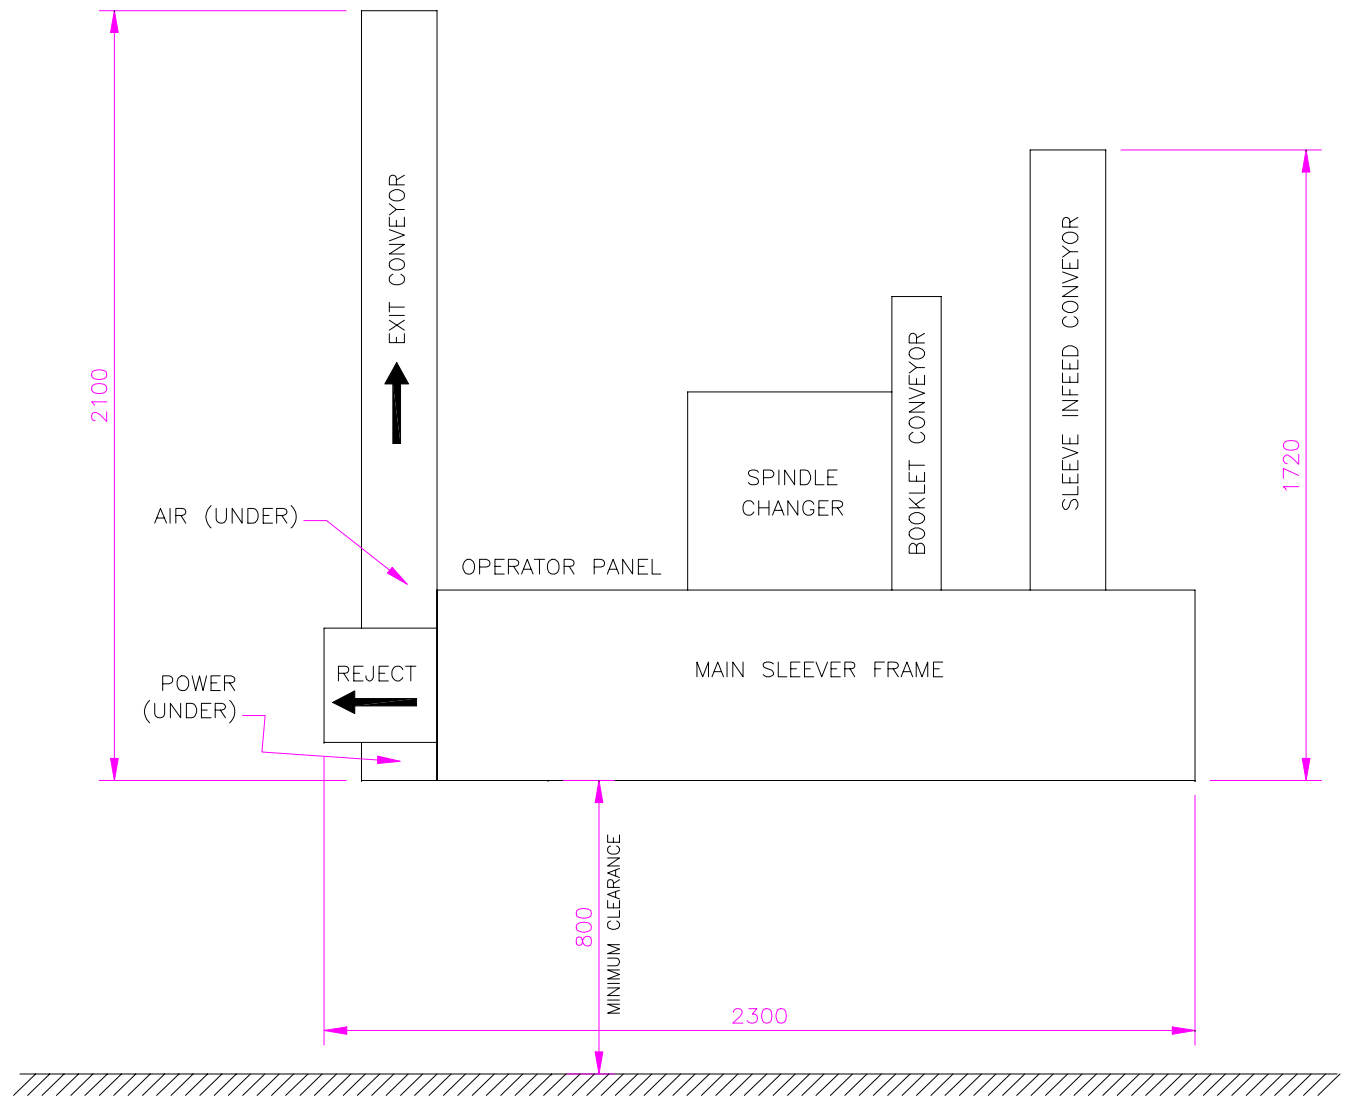


Shipping Information:
 Crate Dimensions - 2440 x 1220 x 1570
 Weight - 350Kg

Installation:
 The SL2200 should be situated indoors in a clean, dry environment on a solid level (preferably concrete) floor. Anti-vibration pads are not necessary.

Electrical:
 The SL2200 requires a 13A single-phase fused power outlet. Minimum cable size to connect to power outlet should be 3 core 1.5mm² PVC or braided flexible cable.

IMPORTANT:
 Check the voltage rating on the machine nameplate before connecting to an electrical outlet.
 This machine **must** be earthed.

Pneumatic:
 The SL2200 requires app. 10cfm at 80psi / 6 bar clean non-lubricated pneumatic supply. A minimum of 10mm air line should be used to connect to the outlet. The pneumatic input connection is located at floor level beside the operator panel.

IT.NO.	QTY.	DESC.	PART NO.
SL-2200 SLEEVING MACHINE GENERAL ASSEMBLY			
BRONWAY LIMITED  BRONWAY		85/89 Furze Road, Sandyford Industrial Estate, Dublin 18, Ireland. Ph: IntL + 353 1 2800200 Fx: IntL + 353 1 2845835 EMAIL: info@bronway.com	This drawing and the information contained on it remains the property of Bronway Limited. It may not be replicated or disclosed to others in any way, without prior written permission.
DRAWN BY DW		DATE 08.05.00	
CHECK BY		DATE	
SCALE 1:20	REV.NO. 1	DRAWING NO. SL-2200-GA-001	SHEET 1 OF 1